



2026 CATALOGUE

Sunfung Technology Corporation Ltd

COMPANY PROFILE



Print finishing and Packaging supplier in China.

Sunfung Technology Corporation is the parent company of Zhejiang Sunfung Technology Corporation Ltd. We are solely committed to the manufacture and supply of high-quality, highly functional print finishing and packaging products in China.

With a professional team of experts, we manufacture and supply long-lasting and durable paper folders, card cutters, automatic creasers, automatic guillotines, laminators and label cutters, etc . 5 years OEM experience for EU, USA, Australia, Korea market.

At Sunfung Technology Corporation, we are committed to ensuring that each client's order is completed with the best, high quality, and stable materials, ensuring each product meets the specifications of our clients and is to their taste and liking.

With a durable, high-quality product, we ensure our clients enjoy our products for long, without the need to spend on unnecessary maintenance or repair. Customer satisfaction and a positive experience with our products are our number 1 priority.

Looking for the best products with high value for money spent? Let us meet your specific needs now!

SF-EA3/EA4/B2

Card Cutter



Card Cutter
Video



SF-B2
Video

Product Introduction

SUNFUNG Introducing the SF-EA3 and SF-EA4 Business Card Cutter, a premium large-format solution designed for on-the-spot, short-run creation of full-bleed business cards, postcards, snapshots, and more. This sturdy and easy-to-operate device is capable of producing up to 230 business cards per minute, catering to the fast-paced demands of modern businesses.

With a user-friendly LCD interface, operators can seamlessly pick from 6 pre-set tasks or input and store up to 10 bespoke cutting configurations. The SF-EA3 and SF-EA4 card cutter is designed to process 12" x 18" and 13" x 19" printed sheets. Its feed tray can hold forty 200gsm sheets simultaneously and is compatible with paper weights reaching 350gsm / 130# cover. The optional mobile cabinet, complete with a waste receptacle, is ideal for users with higher production requirements, offering effortless mobility and storage.


Employing an automatic friction-feed system, the SF-EA3 and SF-EA4 card cutter efficiently cuts coated and uncoated papers, laminated sheets, and cardstock. The device features self-sharpening, precision cutting blades with accuracy up to 0.1mm, while the integrated registration mark reader further refines cutting precision.

A standard 3.5" cutting cassette is included, enabling the production of 24-up 2" x 3.5" business cards. Additional interchangeable cutting cassettes can be acquired to create an assortment of sizes, including 5" x 7" cards, 3.5" x 5" postcards, 4" x 5" snapshots, 8.5" x 11" full-bleed brochures, 11" x 17" menus, gift tags, mailers, and more.

The SF-EA3 and SF-EA4 card cutter, with its accessible features and large-format design, is expertly engineered for precision, taking on-the-spot card cutting to new heights. Its market-leading price and outstanding value make it a standout choice in the industry.

Main Feature

- 1 million cutting guarantee
- Automatic friction feeding
- 40 sheets, 250gsm paper feed tray
- Programmable set
- Heavy duty slitter blade
- CE safety standard
- Self-sharpening blades

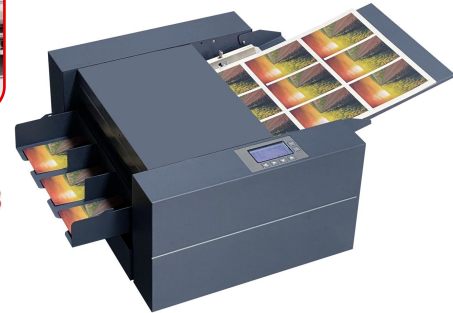

SF-EA3



SF-EA4


SF-EA3/EA4/B2

Card Cutter

Technical Parameters

Model	SF-EA4	SF-EA3	SF-B2
Paper thickness	180 – 450gsm	180 – 350gsm	200 – 350gsm
Paper feed size	A4+, A4 size, 8.5"×11", 8.5"×14"	SRA3, A3+, A3 size, 12"×18", 13"×19"	320x450mm - 530x750mm
Cards size	(85,89,90, 95mm, Customize) x (1-600mm) or (45,50,54mm)	(85,89,90, 95mm, Customize) x (1-600mm) or (45,50,54mm)	(85,89,90, 95mm, Customize) x (1-600mm) or (45,50,54mm)
Paper type	Coated paper, Non-coated paper, Laminated paper	Coated paper, Non-coated paper, Laminated paper	Coated paper, Non-coated paper, Laminated paper
Programmable jobs	Up to 20: 7 pre-programmed, 13 custom	Up to 20: 7 pre-programmed, 13 custom	Up to 20: 7 pre-programmed, 13 custom
Min cut length	40mm	40mm	40mm
Feed volume	10mm or 40pcs paper(0.25mm)	10mm or 40pcs paper(0.25mm)	10mm or 40pcs paper(0.25mm)
Feeding	Double roller friction	Double roller friction	Double roller friction
Registration mark reader	Yes	Yes	Yes
Cutting accuracy	+/-0.05mm	+/-0.05mm	+/-0.05mm
Cutting speed	230 cards per minute	230 cards per minute	300 cards per minute
Machine dimensions	460 x 540 x 260mm	500 x 620 x 260mm	1080 x 550 x 295mm
Weight	19kg	25kg	60kg
Power supply	AC 90-220V , 50/60Hz, 0.5A	AC 90-260V , 50/60Hz, 0.5A	AC 90-260V , 50/60Hz, 0.5A

Application



SF-350P

Label Cutter




Label cutter
VIDEO

Product Introduction

Presenting the Sunfung SF-350P Sheet Cutter, a sophisticated and efficient cutting solution tailored to the labelling industry. Boasting a professionally designed user interface, the SF-350P ensures a seamless and user-friendly experience. Its well-lit icons are easily comprehensible, and navigation control is effortlessly adjustable, with an oversized U-disk button for quick production commencement.

The SF-350P's automatic feeding system enables unattended operation, allowing stickers to be printed edge-to-edge on the media, even outside registration marks. This maximises paper usage, leading to cost savings for your business. The carriage, a critical component, is crafted from top-quality materials to withstand daily wear and tear. Sunfung engineers have addressed heat build-up issues commonly found in other carriage designs.

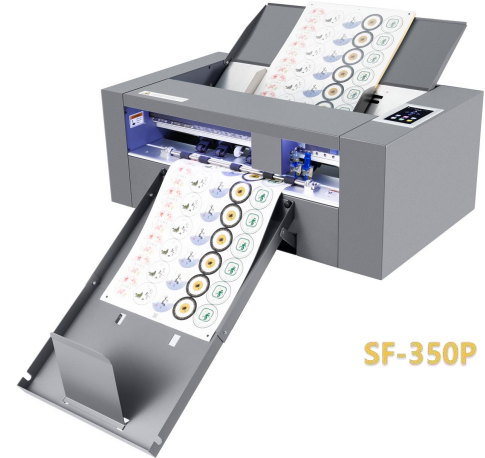

SF-350P

Main Feature

- CDR or AI file cutting available
- Auto feeding with hopper capacity up to 200 sheets or 18mm thick
- 4.3 inch Touch screen for easy operations
- Servo Motor for fast and accurate control
- 4 interfaces include U disk, USB, LAN network, WIFI
- Quiet label cutting with fast speed to 1500mm/s
- 10-500g adjustable downforce, to cut 1mm thick max
- CCD Camera for automatic contour cut
- QR code available
- Linear guide guarantee high cut accuracy and durable use



SF-C350/350/350P

Label Cutter

Technical Parameters

Model	SF-350P
Max sheet size(mm)	350 x 750
Position mode	CCD Camera
Downforce(g)	10 - 500
QR code	YES
Software	CorelDRAW & Adobe Illustrator, Cutmaster
Max cutting speed(mm/s)	1500
Hopper capacity	200 sheets/ 18mm
Display	5.1 inch Touch screen
Computer system	Windows
Driver	High-speed servo motor
Mechanical resolution(mm)	0.01254
Repetition accuracy(mm)	+/- 0.01
Interfaces	U disk, USB, LAN, WIFI
Gross weight(Kg)	40
Package dimensions(mm)	865 x 550 x 410
Power supply	AC100-240V / 50Hz - 60Hz
Environment	5°C- 35°C, up to 70% humidity

Application



SF-350AIR

Adsorbed sheet cutter



Product Introduction

Presenting the Sunfung SF-350AIR/530AIR Sheet Cutter, a high-performance cutting solution tailored for the labelling industry, where speed and precision take center stage.

At its core, the SF-350AIR/530AIR features a suction-type paper feeding system, paired with a larger capacity paper bin and anti-static material design. This innovative setup effectively eliminates double-sheet feeding issues, ensuring a smooth, uninterrupted workflow that sets it apart from conventional models.

Powered by a brand-new AC servo motor and a high-precision servo system, the machine delivers a maximum cutting speed of 1800mm/s—a significant leap in operational efficiency that drastically reduces production time. Complemented by automatic paper feeding, automatic CCD positioning scanning, and cutting, as well as a robust double row platen for secure material fixation, the SF-350AIR/530AIR ensures every cut is precise and consistent.


With a maximum cutting force of 1000 gf, this machine is engineered to handle the most demanding tasks with ease, making it the ideal choice for businesses looking to maximize productivity and stay ahead in a fast-paced industry.



SF-350AIR

Main Feature

- Advanced Feeding System
- High-Speed & Precision Performance
- Robust & Durable Design
- Intelligent & Versatile Operation
- Reliable Technical Specifications



SF-350AIR

Adsorbed sheet cutter

Application



Technical Parameters




Model	SF-350AIR	SF-530AIR
Ways to fix material	Double row platen	
Maximum cutting speed	1800mm/s	
Maximum cut	1000 gf	
Effective cutting area	350x600mm	530*740mm
Positioning method	CCD camera positioning	
Applicable to material rulerinch	A4, A3, A3+	A4, A3, A3+,B4, B3,B2
Machine Precision	0.005 mm (5μm)	
Programming Resolution	HP-GL: 0.025mmV	
Repeatability	0.1mm	
Machine input interface	USB2.0 (Full Speed) / U disk (offline) / network cable/Wifi	
Motherboard Memory	256MB	
Command language	HP-GL	
Number of tools	Single head	
Tool Type	Cutting tools, indentation knives	
Control Panel	5.1 inch LCD touch screen	
Power	100 to 240 V AC, 50/60 Hz (auto switching)	
Power	Max. 200VA (machine),	
machine operating environment	Ambient temperature: 10 to 35 degrees C (35 to 95 degrees F)	
Humidity	35 to 75% RH (non-condensing)	
Land size	775x600x1205mm	900x700x1205mm
Package size	750x680x1020mm	800x780x1200mm
Gross / Net weight	150kg / 130kg	180kg / 150kg
Compatible operating systems and software	Windows, support CDR, AI plug-in mode	

SF-390E

Foiler/Double side laminator



Foiler
Video



Product Introduction

The tabletop compact foiler/double side laminator 390E from Sunfung is a new hot laminator, allows the flexibility of single side OPP roll film lamination and encapsulation providing an affordable and effective solution to outsourcing. Compact-designed laminator helps breathe life into your business by allowing you to provide customers with a service you previously had to outsource, enabling you to offer your customer a true one-stop-shop.

Roll laminators from Sunfung have unique anti-curl technology, in sync with the control panel, ensures that whatever you laminate – a menu, a book cover, or a sheet of business cards – comes out flat with no curl or uplift.

Truly affordable semi-auto electric foiler for digital printing market.



SF-390E

SF-390E

Foiler/Double side laminator

Application



Main Feature

- Foil feature in standard
- Single side lamination
- Double side lamination
- Compact design
- Anti-curl feature
- Non-sticky film roller

Technical Parameters

Model	SF-390E
Max laminate width	375mm
Laminate paper	80-400gsm
Max speed	6 meters/min
Max temperature	140 degree
Display	LED display
Motor	AC motor
Control system	Electric
Power	220V, 50-60Hz
Rubber roller diameter	73mm / 50mm
Core size	3 inch / 1 inch
Power consumption	1600W
Dimensions	1250x680x450mm
Weight	65Kg

SF-390/540

Semi-auto Laminator




SF-390
Video

Product Introduction

Introducing Sunfung's SF-390 and SF-540 Laminator Foiling: Elevating standard print projects to 'extraordinary' heights. The Sunfung SF-390 and SF-540 has been engineered to address specific print finishing needs and constructed to the highest technical standards – featuring fully adjustable pressure and heat settings, designed to provide optimal results with today's digital print outputs.



SF-390/540



Main Feature

- Semi-auto feeding with overlap feature
- Pneumatic auto separation
- The anti-curl bar allows thin film laminates to be flat
- Mirror chrome heating roller
- Thermal or Cold laminating
- Touch screen display system
- Digital foiling
- 2 rolls film installation
- Adjustable electric hydraulic pressure system



SF-540
Video

Technical Parameters


Model	SF-390	SF-540
Max laminate width	390mm	540mm
Laminate paper	157-350gsm	157-350gsm
Max speed	15 meters/min	15 meters/min
Control system	Hydraulic	Hydraulic
Max temperature	140 degree	140 degree
Heating mode	Oil heating	Oil heating
Upper roll	High gloss chromium plating 120mm	High gloss chromium plating 160mm
Down roll	Silicon rubber 80mm	Silicon rubber 100mm
Display	Touch screen	Touch screen
Motor	AC motor	AC motor
Input power	3500W	4000W
Paper overlap accuracy	1.5mm	1.5mm
Power	220V - 240V, 50-60Hz	220V - 240V, 50-60Hz
Core size	3 inch	3 inch
Film thickness	25 - 32 mic	17 - 42 mic
Package dimensions	760x830x1350mm	720x910x1360mm
Net weight	210Kg	240Kg
Gross weight	285Kg	325Kg

SF-390A

Auto Laminator



SF-390A
Video



Product Introduction

Laminator Supplier Sunfung newly introduced Automatic roll laminator SF-390A is an innovative laminating system designed for laminating. This model is available in 390mm width. The SF-390A automatic roll laminator gives the flexibility of single side lamination, providing an affordable and effective solution, compared to outsourcing.

The SF-390A automatic roll laminator is one of the best single sided thermal laminating machines available in the market. They're simple to use, easy to maintain, quick, and reliable.



SF-390A

Main Feature

- Auto feeding with air suction
- Pneumatic auto separation
- The anti-curl bar allows thin film laminates to be flat
- Mirror chrome heating roller
- Thermal or Cold laminating
- Touch screen display system
- Digital foiling
- 2 rolls film installation
- Adjustable electric hydraulic pressure system

Technical Parameters

Model	SF-390A
Max. size of paper(mm)	390 × 700
Film thickness(mic)	20 - 45
Power consumption(W)	3200W
Max speed	15 m/min
Temperature range	80-130 degree
Paper thickness(gsm)	130-400
Auto feeding	Yes
Feed capacity	28cm/ 1400 sheets, 200gsm
Feeding method	Dual air suction
Film rolls	2 rolls installation/ 2000m
Warm up time(minutes)	10
Pressure control	Hydraulic
Display	7 inch Touch screen
Core size	3"
Foil feature	Yes
Heating method	Steel roller with oil
Power supply	220-240V, 50Hz/60Hz
Machine Dimension(mm)	W1730 x D800 x H1480
Gross weight(Kg)	380
Certification	CE

SF-390EM/540EM

Hydraulic laminator with Embossing




Product Introduction

Both lamination and foiling-film rolls with Embossing roller are available in a variety of widths and lengths, offering excellent value and cost-effective production – especially when using the SF-390EM and SF-540EM model with its extended input table for banners and lengthy media. The SF-390EM and SF-540EM boasts hydraulic pressure, essential for achieving exceptional finishing when foiling is desired. The hydraulic pressure is provided by the built-in silent compressor located in the SF-390EM and SF-540EM body. This semi-automatic system is hand-fed with automatic sheet separation. With the ability to work at speeds of up to 10 metres per minute, the Sunfung SF-390EM and SF-540EM can laminate over 1300 SRA3 sheets per hour.



SF-390EM/540EM





Main Feature

- Embossing available(drawing according customer request)
- Semi-auto feeding with overlap feature
- Pneumatic auto separation
- The anti-curl bar allows thin film laminates to be flat
- Mirror chrome heating roller
- Thermal or Cold laminating
- Touch screen display system
- Digital foiling
- 2 rolls film installation
- Adjustable electric hydraulic pressure system

SF-390EM/540EM


Hydraulic laminator with Embossing

Model	SF-390EM	SF-540EM
Max laminate width	390mm	540mm
Laminate paper	128-350gsm	128-350gsm
Max speed	10 meters/min	10 meters/min
Control system	Hydraulic	Hydraulic
Max temperature	140 degree	140 degree
Heating mode	Oil heating	Oil heating
Upper roll	High gloss chromium plating 120mm	High gloss chromium plating 160mm
Down roll	Silicon rubber 80mm	Silicon rubber 100mm
Display	Touch screen	Touch screen
Motor	AC motor	AC motor
Input power	4200W	5500W
Paper overlap accuracy	1.5mm	1.5mm
Power	220V - 240V, 50-60Hz	220V - 240V, 50-60Hz
Core size	3 inch	3 inch
Film thickness	17 - 42 mic	17 - 42 mic
Machine dimensions	2350x780x1450mm	2480x890x1450mm
Package dimensions	760x830x1350mm	720x910x1360mm
Net weight	210Kg	240Kg
Gross weight	285Kg	325Kg



SF-540A

Auto Laminator



SF-540A

Product Introduction

Automatic laminator- Heavy duty from Sunfung is a hot laminator that allows the flexibility of single side OPP roll film lamination and encapsulation providing an affordable and effective solution to outsourcing.

It is built for continuous use on an everyday basis, and constructed using parts of the highest quality only. The hydraulic laminator has been designed to help breathe life into your business by allowing you provide customers with a service you previously had to outsource, enabling you to offer your customers a true one-stop shop.

The automatic laminator designed in-house by Sunfung to help breathe life into your business by allowing you to provide your customers with a service you previously had to outsource. It has anti-curl technology to ensure that whatever you laminate comes out smooth and flat. Also it has an automatic feed with auto-overlap. This is the best value single-sided laminator on the market, is simple to use, easy to maintain, quick and reliable.

The automatic feed with auto-overlap makes it easy to feed your work through the laminator and the separator ensures it's ready for the guillotine the moment it's been laminated.

Automatic laminators from Sunfung have unique anti-curl technology, in sync with the control panel, ensures that whatever you laminate – a menu, a book cover or a sheet of business cards – comes out flat with no curl or uplift.

SF-540A

Auto Laminator



SF-540A
Video

Main Feature

- Auto feeding with air suction
- Pneumatic auto separation
- Heavy duty construction
- 20m/min laminating speed
- Mirror chrome heating roller
- Thermal or Cold laminating
- Touch screen display system
- Digital foiling
- Adjustable electric hydraulic pressure system
- Large feeding volume, 2500 sheets, 200gsm paper

Application



Technical Parameters

Model	SF-540A
Roll film width	540*760mm
Roll film thickness	17-45 mic
Speed	20m/min
Feeding mode	Dual air suction
Core	3 inch
Auto feeding	Yes
Voltage	380V, three phase, 50-60Hz
Weight	510kg(G.W.)
Laminating material	BOPP film
Paper thickness	130-450 g/m ²
Temperature	20-140℃
Pressure control	Hydraulic
Display	7 inch touch screen
Foil feature	Yes
Power	6.5kw(total)
Size(mm)	1500*1150*1350(Machine)

SF-30A

Creaser




SF-30A
VIDEO

Product Introduction


7 inch touch screen guarantee user with good working experiences with this machine. Whole set slide tool guarantee the accuracy and long time use. Also the SF-30A added the linear tool, so that customer can make cross line creasing or perforations in one pass. Paper length for 900mm feeding and collection is OK. Creasing speed been updated to 8200 pages per hour.




Application




-Single Crease-



-Perf & Crease-



-Spine & Hinge-



- Flatback -

Technical Parameters

Model	SF-30A
Paper size	150*140mm(Min), 330*900mm(Max)
Paper thickness	60-400 g/m ² (creasing), 100-200 g/m ² (perforating)
Paper type	Coated paper, Laminated paper, Varnish paper etc.
Working accuracy	±0.3mm
Working speed	8200 pages/h (one crease on each A4 paper)
Creasing times in each paper	0-32 times
Voltage	220V/50Hz, 110V/60Hz
Power	600w
Weight	124kg(N.W.), 130kg(G.W.)
Size(mm)	2040*560*1140(Machine), 760*680*530(Package)



SF-30A

SF-H52P/H67P/H72P/H82P



Heavy duty Cutter

Product Introduction

SF-HD heavy duty paper cutters, three models. 300gsm paper full load keep working 24 hours. They are the most powerful to precisely cut large stacks of paper stock. Our SF-HD series of hydraulic and programmable paper cutter is the perfect cutter for print finishing and on-demand use. SF-HD uses 380V three-phase electricity. SF-HD paper cutters are available in fully-automatic models. Cutting widths are available up to 800 mm. If you are looking for a high quality, reliable hydraulic and programmable paper cutter; you have come to the right place. Whether your market is quick-print, copy shop, in-plant, offset, or on-demand, we have the ideal cutter for your needs. We design the paper cutting machines so that they are user friendly and easy to operate, thanks to features such as LED display touchscreen with full status, and side buttons for easy two-handed operation. Equipped with state of the art security features including CE standard safety beam guards, our cutters are designed to be safe.

Main Feature

- Aviation aluminum sheet table with hard oxidation treatment
- PC Board with safety relay and transducer control
- Clamp pressure from 2,000—20,000 N adjustable
- 100 programs with 30 steps each
- 15.6 inch touchscreen full-color display
- Heavy-duty complete strong design
- Industrial infrared safety guard
- AC Servo Motor
- Double linear guide rail back gauge control
- Hydraulic oil temperature check and cut depth compensation
- Air table
- Omron sensors
- Efficient foot pedal



SF-H72P

SF-H52P/H67P/H72P/H82P


Heavy duty Cutter



SF-H52P
Video




SF-H72P/H82P
Video

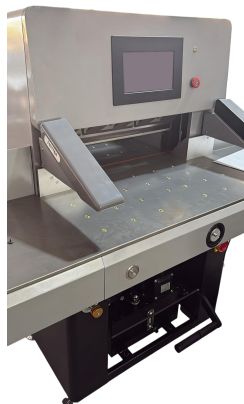

SF-H72P

Technical Parameters

Model	SF-H52P	SF-H67P	SF-H72P	SF-H82P
Max cut width	520mm	670mm	720 mm	820mm
Min cut width	30mm	30mm	30 mm	30mm
Max cut thickness	80mm	80mm	80 mm	100mm
Cut accuracy	0.2mm	0.2mm	0.2mm	0.2mm
Clamp mode	Hydraulic + Foot pedal	Hydraulic + Foot pedal	Hydraulic + Foot pedal	Hydraulic + Foot pedal
Push mode	Program Control with Servo Motor	Program Control with Servo Motor	Program Control with Servo Motor	Program Control with Servo Motor
Display	10.1 inch touch screen	10.1 inch touch screen	15.6 inch touch screen	15.6 inch touch screen
Safety mechanism	Blade lock + CE safety beam guard	Blade lock + CE safety beam guard	Blade lock + CE safety beam guard	Blade lock + CE safety beam guard
Power supply	220V, single phases, 50-60Hz	220V, single phases, 50-60Hz	380V, 3 phases, 50-60Hz (220V, single phases-option)	380V, 3 phases, 50-60Hz (220V, single phases-option)
Power	1800W, variable frequency motor, 3 phases output	1800W, variable frequency motor, 3 phases output	2200W, variable frequency motor, 3 phases output	2200W, variable frequency motor, 3 phases output
Size in front of the blade	525mm	525mm	525mm	560mm
Size after the blade	520mm	620mm	720mm	820mm
Operation Height	960mm	960mm	960mm	960mm
Configuration	With air pump, with side table, with mechanical safety knife lock	With air pump, with side table, with mechanical safety knife lock	With air pump, with mechanical safety knife lock	With air pump, with side table, with mechanical safety knife lock, with electric foot pedal
Blade include	2 pcs			
Dimensions	W 1250 x D 1010 x H 1390 mm	W 1250 x D 1010 x H 1390 mm	W 1500 x D 1055 x H 1460 mm	W 1650 x D 1085 x H 1460 mm
Net weight	415 kg	575 kg	750 Kg	820 kg
Gross weight	450 kg	600 kg	820Kg	935 kg



SF-14M

Paper Folder



SF-14M
VIDEO

Product Introduction

The SF-14M Paper Folder is a fast, dependable and easy-to-use solution for virtually all folding applications. Popular folds are clearly marked on the fold plates for quick set-up and operation: simply slide the fold stop to the desired fold and go. Additional fold adjustments can be made with the fine tuning knobs at the end of each fold plates for precision folding.

The SF-14M paper folding machine handles the paper with a maximum speed of 7200 sheets/h. The capacity of the automatic feed station is up to 500 sheets. The job counter informs about the number of folded sheets.

Main Feature

- **EASY SET**


It is easy to adjust the paper fold types and paper delivery positions according to different fold types.

- **FOLD TYPES**

It holds over 12 different kinds of fold types based on the 4 fold plates.

- **SMALL PAPER FOLDINGS**

With the A4 paper stackers, it can work with small paper from 50 – 70 mm. If your paper is A3 size, please check our SF-34M paper folder.

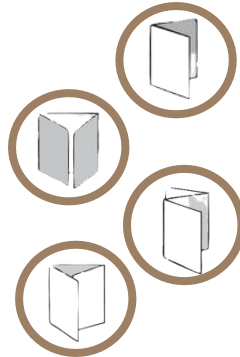

Technical Parameters

Model	SF-14M
Folding speed	7000 sheets/h
Paper size	B6-A4
Paper weight	35-120 g/m ²
Hopper capacity	300 sheets, 64 g/m ²
Power supply	220V, 50Hz/ 110V, 60Hz
Size	W 480* D 520* H 470 mm
Weight	25kg



SF-14M

SF-34M

Paper Folder




SF-34M
VIDEO

Product Introduction

Paper folding machine SF-34M is a fast, dependable and easy-to-use solution for virtually all folding applications. Popular folds are clearly marked on the fold plates for quick set-up and operation. Simply slide the fold stop to the desired fold and go. Additional fold adjustments can be made with the fine tuning knobs at the end of each fold plates for precision folding.

Main Feature

- **CROSS FOLDINGS**
34M can have the cross folding options. Simply add the 2P/4P backend paper folder.
- **FOLD TYPES**
Over 10 popular fold types available.
- **PAPER FEEDING**
Technically speaking, when feeding is good, then the folder runs perfectly.

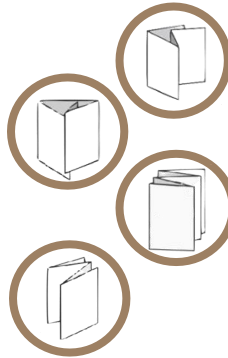

Technical Parameters

Model	SF-34M
Folding speed	7000 sheets/h
Paper size	B6-A3
Paper weight	50-200 g/m ²
Hopper capacity	500 sheets, 64 g/m ²
Power supply	220V, 50Hz/ 110V, 60Hz
Size	W 1240* D 550* H 464 mm
Weight	48kg



SF-34M

SF-5070/9012

Flatbed Cutting Plotter



Flatbed cutting plotter

Product Introduction

The Sunfung flatbed cutting plotter represents the latest in advanced flatbed technology. Designed with an eye for precision and accuracy, it allows clean and accurate cuts in a wide array of materials. While designed primarily as very fast cutter for projects such a box prototyping, custom packaging etc., the repeatability of precisely following the same line multiple times allows the flatbed cutting plotter to punch well above its weight class when dealing with tough substrates.

Perforation cut, Kiss cut, Die cut, Creasing – everything you need to create production quality products. Included Tools are Cutter Blade / Pen / Creasing/Etching tool. Dual head operation allows wide choice of options.

The advanced CCD camera allows the flatbed to read registration marks as small as 5mm, even on hard to read colored, transparent, glossy or reflective materials. Reading 4 registration marks can happen as fast as 4 seconds, which means production times are maximized. The user interface has been designed to be intuitive and allow first time users to easily operate the flatbed. All common and needed functions can be executed in a few easy to follow touches. The large and bright screen guarantees that cutter status is easily visible at a glance.

Main Feature


- High-resolution camera for accurate detection of registration marks on both colored and transparent materials
- Variable material available like high reflective material, transparent materials, PVC, magnet material, etc
- SignMaster software support Ai 8.0, PDF, all bitmap file format
- Perforation cut, Kiss cut, Die-cut, Creasing
- 50-2000g adjustable downforce
- Windows OS compatibility
- Make packaging boxes, tags, hobbies & crafts, labels, etc
- 2 years warranty



SF-5070



SF-9012



SF-5070/9012

Flatbed Cutting Plotter

Technical Parameters

Model	SF-5070	SF-9012
Holding method	Vacuum suction	Vacuum suction
Max cutting surface(mm)	700x500	1200x900
Cut function	Die-cut/Crease/kiss-cut/Perforation	Die-cut/Crease/kiss-cut/Perforation
Maximum cutting thickness	600 gf	600 gf
Max cutting speed(mm/s)	1200	1200
Operation	5.1-inch LCD Touch Screen	5.1-inch LCD Touch Screen
File format	Ai8.0, PDF, all bitmap	Ai8.0, PDF, all bitmap
Mechanical resolution(mm)	0.01	0.01
Repetition accuracy(mm)	+/- 0.05	+/- 0.05
Disposition	High precision servo system,CCD positioning scanning cutting	High precision servo system,CCD positioning scanning cutting
Interfaces	U-disk, USB2.0,WIFI	U-disk, USB2.0,WIFI
Software	CDR,AI plug-in mode	CDR,AI plug-in mode
Min mark edge(mm)	8	8
Gross weight(Kg)	150	180
Package dimensions(mm)	120×100X55CM(machine) 44X39X48CM (vacuum pump)	160×45X55CM(machine) 44X39X48CM (vacuum pump)
Power supply	AC100-240V / 50Hz - 60Hz, 100W/780W(air pump)	AC100-240V / 50Hz - 60Hz, 100W/780W(air pump)
Environment	5°C - 35°C , up to 70% humidity	5°C - 35°C , up to 70% humidity

Application

PACKAGING



TAGS



HOBBIES/CRAFTS



LABELS



SF-340PRO

Gluing & Creasing Integrated Machine

Main Feature

- 10-inch Touch Screen
The interface is simple; The operation is simpler; The experience is stronger
- Dual Temp Control
Double rubber trough; The side glue is thin; The base glue is full; Even rubber rollerwheel
- Industrial-grade System
Electromechanical separation; The operation is safer; Extend main board usage time
- CNC Creasing
Auto spine creasing; Craft Exquisite; Better book shaping
- All-aluminium Trolley
Bidirectional 8 guide rails; Clamping structure; Inner pages flat and firm
- Auto Feeding
Strong paper suction; Smooth paper feeding; Beautiful indentation
- Linear Guide Operation
Stable walking; Precise stop; The voice is softer
- Double Cover Adjust
Numerical control adjustment; Double positioning; Precisely book gluing



SF-340PRO

Technical Parameters

Model	SF-340PRO
Display	10-inch touch screen
Book binding length	70-340 mm
Book binding thickness	0.1-60mm
Glue melting time	≤45min
Book binding speed	300-400 books/hour
Milling cutter	24-tooth high speed disk milling cutter
Glue roller	base glue wheel+side gule wheel+gule roller
Book cover weight	120-300g
Max.book cover size	600(L)*340(W) mm
Power	220V/3200W
Machine size	2180*850*1200 mm
Machine weight	400KG



EU SHOWROOM



EU showroom
Video



+



+



EU SHOWROOM in
Greece



TRADE SHOW

PRINTING UNITED
EXPO

Printing united 2024
in USA, September
2024

ExpoPrint Latin America 2026
in Brazil, March 2026

EXPOPRINT
LATIN AMERICA

drupa
the 1 for printing
technologies

Drupa 2024
in Germany, June
2024




**CHINA
PRINT 2025**

China Print 2025 in Beijing,
May 2025

All in Print

All in Print 2026 in
Shanghai,
Oct 2026





Sunfung Technology Corporation Ltd

Leading Print Finishing Equipments Supplier

Tel: 0086-57185175095

Add: No 259 Wensan Road, Xihu District, Hangzhou, China

Email: info@sunfung-tech.com

Website: <https://sunfung-tech.com>



SF Introduction
Video