



# 2026 CATALOGUE

**Sunfung Technology Corporation Ltd**

# COMPANY PROFILE



## **Print finishing and Packaging supplier in China.**

*Sunfung Technology Corporation* is the parent company of Zhejiang Sunfung Technology Corporation Ltd. We are solely committed to the manufacture and supply of high-quality, highly functional print finishing and packaging products in China.

With a professional team of experts, we manufacture and supply long-lasting and durable paper folders, card cutters, automatic creasers, automatic guillotines, laminators and label cutters, etc . 5 years OEM experience for EU, USA, Australia, Korea market.

At Sunfung Technology Corporation, we are committed to ensuring that each client's order is completed with the best, high quality, and stable materials, ensuring each product meets the specifications of our clients and is to their taste and liking.

With a durable, high-quality product, we ensure our clients enjoy our products for long, without the need to spend on unnecessary maintenance or repair. Customer satisfaction and a positive experience with our products are our number 1 priority.

Looking for the best products with high value for money spent? Let us meet your specific needs now!



# SF-EA3/EA4/B2

## Card Cutter



Card Cutter  
Video



SF-B2  
Video

### Product Introduction

SUNFUNG Introducing the SF-EA3 and SF-EA4 Business Card Cutter, a premium large-format solution designed for on-the-spot, short-run creation of full-bleed business cards, postcards, snapshots, and more. This sturdy and easy-to-operate device is capable of producing up to 230 business cards per minute, catering to the fast-paced demands of modern businesses.

With a user-friendly LCD interface, operators can seamlessly pick from 6 pre-set tasks or input and store up to 10 bespoke cutting configurations. The SF-EA3 and SF-EA4 card cutter is designed to process 12" x 18" and 13" x 19" printed sheets. Its feed tray can hold forty 200gsm sheets simultaneously and is compatible with paper weights reaching 350gsm / 130# cover. The optional mobile cabinet, complete with a waste receptacle, is ideal for users with higher production requirements, offering effortless mobility and storage.

Employing an automatic friction-feed system, the SF-EA3 and SF-EA4 card cutter efficiently cuts coated and uncoated papers, laminated sheets, and cardstock. The device features self-sharpening, precision cutting blades with accuracy up to 0.1mm, while the integrated registration mark reader further refines cutting precision.

A standard 3.5" cutting cassette is included, enabling the production of 24-up 2" x 3.5" business cards. Additional interchangeable cutting cassettes can be acquired to create an assortment of sizes, including 5" x 7" cards, 3.5" x 5" postcards, 4" x 5" snapshots, 8.5" x 11" full-bleed brochures, 11" x 17" menus, gift tags, mailers, and more.


The SF-EA3 and SF-EA4 card cutter, with its accessible features and large-format design, is expertly engineered for precision, taking on-the-spot card cutting to new heights. Its market-leading price and outstanding value make it a standout choice in the industry.

### Main Feature

- 1 million cutting guarantee
- Automatic friction feeding
- 40 sheets, 250gsm paper feed tray
- Programmable set
- Heavy duty slitter blade
- CE safety standard
- Self-sharpening blades



SF-EA3

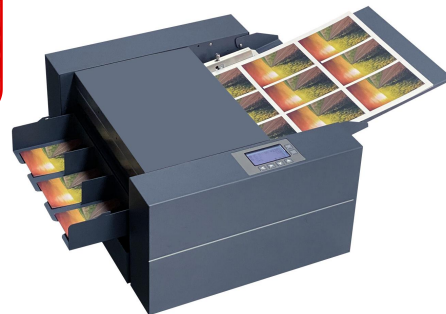

SF-EA4


# SF-EA3/EA4/B2

## Card Cutter

## Technical Parameters

Model	SF-EA4	SF-EA3	SF-B2
Paper thickness	180 – 450gsm	180 – 350gsm	200 – 350gsm
Paper feed size	A4+, A4 size, 8.5"×11", 8.5"×14"	SRA3, A3+, A3 size, 12"×18", 13"×19"	320x450mm - 530x750mm
Cards size	(85,89,90, 95mm, Customize) x (1-600mm) or (45,50,54mm)	(85,89,90, 95mm, Customize) x (1-600mm) or (45,50,54mm)	(85,89,90, 95mm, Customize) x (1-600mm) or (45,50,54mm)
Paper type	Coated paper, Non-coated paper, Laminated paper	Coated paper, Non-coated paper, Laminated paper	Coated paper, Non-coated paper, Laminated paper
Programmable jobs	Up to 20: 7 pre-programmed, 13 custom	Up to 20: 7 pre-programmed, 13 custom	Up to 20: 7 pre-programmed, 13 custom
Min cut length	40mm	40mm	40mm
Feed volume	10mm or 40pcs paper(0.25mm)	10mm or 40pcs paper(0.25mm)	10mm or 40pcs paper(0.25mm)
Feeding	Double roller friction	Double roller friction	Double roller friction
Registration mark reader	Yes	Yes	Yes
Cutting accuracy	+/-0.05mm	+/-0.05mm	+/-0.05mm
Cutting speed	230 cards per minute	230 cards per minute	300 cards per minute
Machine dimensions	460 x 540 x 260mm	500 x 620 x 260mm	1080 x 550 x 295mm
Weight	19kg	25kg	60kg
Power supply	AC 90-220V , 50/60Hz, 0.5A	AC 90-260V , 50/60Hz, 0.5A	AC 90-260V , 50/60Hz, 0.5A

## Application



# SF-350AIR

## Adsorbed sheet cutter



### Product Introduction

Presenting the Sunfung SF-350AIR/530AIR Sheet Cutter, a high-performance cutting solution tailored for the labelling industry, where speed and precision take center stage.

At its core, the SF-350AIR/530AIR features a suction-type paper feeding system, paired with a larger capacity paper bin and anti-static material design. This innovative setup effectively eliminates double-sheet feeding issues, ensuring a smooth, uninterrupted workflow that sets it apart from conventional models.

Powered by a brand-new AC servo motor and a high-precision servo system, the machine delivers a maximum cutting speed of 1800mm/s—a significant leap in operational efficiency that drastically reduces production time. Complemented by automatic paper feeding, automatic CCD positioning scanning, and cutting, as well as a robust double row platen for secure material fixation, the SF-350AIR/530AIR ensures every cut is precise and consistent.



With a maximum cutting force of 1000 gf, this machine is engineered to handle the most demanding tasks with ease, making it the ideal choice for businesses looking to maximize productivity and stay ahead in a fast-paced industry.



SF-350AIR

### Main Feature

- Advanced Feeding System
- High-Speed & Precision Performance
- Robust & Durable Design
- Intelligent & Versatile Operation
- Reliable Technical Specifications



# SF-350AIR

## Adsorbed sheet cutter

### Application



### Technical Parameters

Model	SF-350AIR	SF-530AIR
Ways to fix material	Double row platen	
Maximum cutting speed	1800mm/s	
Maximum cut	1000 gf	
Effective cutting area	350x600mm	530*740mm
Positioning method	CCD camera positioning	
Applicable to material rulerinch	A4, A3, A3+	A4, A3, A3+,B4, B3,B2
Machine Precision	0.005 mm (5μm)	
Programming Resolution	HP-GL: 0.025mmV	
Repeatability	0.1mm	
Machine input interface	USB2.0 (Full Speed) / U disk (offline) / network cable/Wifi	
Motherboard Memory	256MB	
Command language	HP-GL	
Number of tools	Single head	
Tool Type	Cutting tools, indentation knives	
Control Panel	5.1 inch LCD touch screen	
Power	100 to 240 V AC, 50/60 Hz (auto switching)	
Power	Max. 200VA (machine),	
machine operating environment	Ambient temperature: 10 to 35 degrees C (35 to 95 degrees F)	
Humidity	35 to 75% RH (non-condensing)	
Land size	775x600x1205mm	900x700x1205mm
Package size	750x680x1020mm	800x780x1200mm
Gross / Net weight	150kg / 130kg	180kg / 150kg
Compatible operating systems and software	Windows, support CDR, AI plug-in mode	

# SF-390/540

## Semi-auto Laminator



SF-390  
Video

### Product Introduction

Introducing Sunfung's SF-390 and SF-540 Laminator Foiling: Elevating standard print projects to 'extraordinary' heights. The Sunfung SF-390 and SF-540 has been engineered to address specific print finishing needs and constructed to the highest technical standards – featuring fully adjustable pressure and heat settings, designed to provide optimal results with today's digital print outputs.



SF-390/540

### Main Feature

- Semi-auto feeding with overlap feature
- Pneumatic auto separation
- The anti-curl bar allows thin film laminates to be flat
- Mirror chrome heating roller
- Thermal or Cold laminating
- Touch screen display system
- 2 rolls film installation
- Adjustable electric hydraulic pressure system



SF-540  
Video

### Technical Parameters

Model	SF-390	SF-540
Max laminate width	390mm	540mm
Laminate paper	157-350gsm	157-350gsm
Max speed	15 meters/min	15 meters/min
Control system	Hydraulic	Hydraulic
Max temperature	140 degree	140 degree
Heating mode	Oil heating	Oil heating
Upper roll	High gloss chromium plating 120mm	High gloss chromium plating 160mm
Down roll	Silicon rubber 80mm	Silicon rubber 100mm
Display	Touch screen	Touch screen
Motor	AC motor	AC motor
Input power	3500W	4000W
Paper overlap accuracy	1.5mm	1.5mm
Power	220V - 240V, 50-60Hz	220V - 240V, 50-60Hz
Core size	3 inch	3 inch
Film thickness	25 - 32 mic	17 - 42 mic
Package dimensions	760x830x1350mm	720x910x1360mm
Net weight	210Kg	240Kg
Gross weight	285Kg	325Kg

# SF-390A/540A

## Auto Laminator



SF-390A  
Video



SF-540A  
Video

## Main Feature

- Auto feeding with air suction
- Pneumatic auto separation
- Heavy duty construction
- 20m/min laminating speed
- Mirror chrome heating roller
- Thermal or Cold laminating
- Touch screen display system
- Digital foiling
- Adjustable electric hydraulic pressure system
- Large feeding volume: 2500 sheets (200gsm paper)
- Anti-curl bar to ensure thin film laminates come out flat
- 2 rolls film installation capability



## Product Introduction

Laminator Supplier Sunfung newly introduced Automatic roll laminator SF-390A/540A is an innovative laminating system designed for laminating. This model is available in 390mm/540mm width. The SF-390A/540A automatic roll laminator gives the flexibility of single side lamination, providing an affordable and effective solution, compared to outsourcing.

The SF-390A/540A automatic roll laminator is one of the best single sided thermal laminating machines available in the market. They're simple to use, easy to maintain, quick, and reliable.



## Technical Parameters

Model	SF-390A	SF-540A
Roll film width	390*700mm	540*760mm
Roll film thickness	20-45	17-45 mic
Speed	15m/min	20m/min
Feeding mode	Dual air suction	Dual air suction
Core	3 inch	3 inch
Auto feeding	Yes	Yes
Voltage	220-240V, single phase 50Hz/60Hz	380V, three phase, 50-60Hz
Weight	380kg(G.W.)	510kg(G.W.)
Laminating material	BOPP film	BOPP film
Paper thickness	130-450 g/m <sup>2</sup>	130-450 g/m <sup>2</sup>
Temperature	20-140°C	20-140°C
Pressure control	Hydraulic	Hydraulic
Display	7 inch touch screen	7 inch touch screen
Foil feature	Yes	Yes
Power	3.2kw(total)	6.5kw(total)
Size(mm)	1730*800*1480(Machine)	1500*1150*1350(Machine)



SF-390A

# SF-30A

Creaser




SF-30A  
VIDEO

## Product Introduction


7 inch touch screen guarantee user with good working experiences with this machine. Whole set slide tool guarantee the accuracy and long time use. Also the SF-30A added the linear tool, so that customer can make cross line creasing or perforations in one pass. Paper length for 900mm feeding and collection is OK. Creasing speed been updated to 8200 pages per hour.




## Application




-Single Crease-



-Perf & Crease-



-Spine & Hinge-



- Flatback -

## Technical Parameters

Model	SF-30A
Paper size	150*140mm(Min), 330*900mm(Max)
Paper thickness	60-400 g/m <sup>2</sup> (creasing), 100-200 g/m <sup>2</sup> (perforating)
Paper type	Coated paper, Laminated paper, Varnish paper etc.
Working accuracy	±0.3mm
Working speed	8200 pages/h (one crease on each A4 paper)
Creasing times in each paper	0-32 times
Voltage	220V/50Hz, 110V/60Hz
Power	600w
Weight	124kg(N.W.), 130kg(G.W.)
Size(mm)	2040*560*1140(Machine), 760*680*530(Package)



SF-30A

# SF-H52P/H67P/H72P/H82P



## Heavy duty Cutter

### Product Introduction

SF-HD heavy duty paper cutters, three models. 300gsm paper full load keep working 24 hours. They are the most powerful to precisely cut large stacks of paper stock. Our SF-HD series of hydraulic and programmable paper cutter is the perfect cutter for print finishing and on-demand use. SF-HD uses 380V three-phase electricity. SF-HD paper cutters are available in fully-automatic models. Cutting widths are available up to 800 mm. If you are looking for a high quality, reliable hydraulic and programmable paper cutter; you have come to the right place. Whether your market is quick-print, copy shop, in-plant, offset, or on-demand, we have the ideal cutter for your needs. We design the paper cutting machines so that they are user friendly and easy to operate, thanks to features such as LED display touchscreen with full status, and side buttons for easy two-handed operation. Equipped with state of the art security features including CE standard safety beam guards, our cutters are designed to be safe.

### Main Feature

- Aviation aluminum sheet table with hard oxidation treatment
- PC Board with safety relay and transducer control
- Clamp pressure from 2,000—20,000 N adjustable
- 100 programs with 30 steps each
- 15.6 inch touchscreen full-color display
- Heavy-duty complete strong design
- Industrial infrared safety guard
- AC Servo Motor
- Double linear guide rail back gauge control
- Hydraulic oil temperature check and cut depth compensation
- Air table
- Omron sensors
- Efficient foot pedal



SF-H72P

# SF-H52P/H67P/H72P/H82P


## Heavy duty Cutter



SF-H52P  
Video





SF-H72P/H82P  
Video

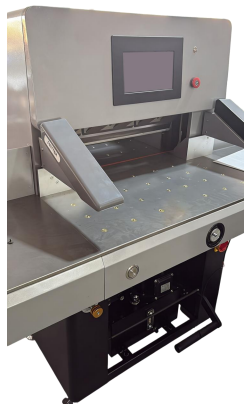

SF-H72P

### Technical Parameters

Model	SF-H52P	SF-H67P	SF-H72P	SF-H82P
Max cut width	520mm	670mm	720 mm	820mm
Min cut width	30mm	30mm	30 mm	30mm
Max cut thickness	80mm	80mm	80 mm	100mm
Cut accuracy	0.2mm	0.2mm	0.2mm	0.2mm
Clamp mode	Hydraulic + Foot pedal	Hydraulic + Foot pedal	Hydraulic + Foot pedal	Hydraulic + Foot pedal
Push mode	Program Control with Servo Motor	Program Control with Servo Motor	Program Control with Servo Motor	Program Control with Servo Motor
Display	10.1 inch touch screen	10.1 inch touch screen	15.6 inch touch screen	15.6 inch touch screen
Safety mechanism	Blade lock + CE safety beam guard	Blade lock + CE safety beam guard	Blade lock + CE safety beam guard	Blade lock + CE safety beam guard
Power supply	220V, single phases, 50-60Hz	220V, single phases, 50-60Hz	380V, 3 phases, 50-60Hz (220V, single phases-option)	380V, 3 phases, 50-60Hz (220V, single phases-option)
Power	1800W, variable frequency motor, 3 phases output	1800W, variable frequency motor, 3 phases output	2200W, variable frequency motor, 3 phases output	2200W, variable frequency motor, 3 phases output
Size in front of the blade	525mm	525mm	525mm	560mm
Size after the blade	520mm	620mm	720mm	820mm
Operation Height	960mm	960mm	960mm	960mm
Configuration	With air pump, with side table, with mechanical safety knife lock	With air pump, with side table, with mechanical safety knife lock	With air pump, with mechanical safety knife lock	With air pump, with side table, with mechanical safety knife lock, with electric foot pedal
Blade include	2 pcs			
Dimensions	W 1250 x D 1010 x H 1390 mm	W 1250 x D 1010 x H 1390 mm	W 1500 x D 1055 x H 1460 mm	W 1650 x D 1085 x H 1460 mm
Net weight	415 kg	575 kg	750 Kg	820 kg
Gross weight	450 kg	600 kg	820Kg	935 kg



# SF-34M

## Paper Folder




SF-34M  
VIDEO

### Product Introduction

Paper folding machine SF-34M is a fast, dependable and easy-to-use solution for virtually all folding applications. Popular folds are clearly marked on the fold plates for quick set-up and operation. Simply slide the fold stop to the desired fold and go. Additional fold adjustments can be made with the fine tuning knobs at the end of each fold plates for precision folding.

### Main Feature

- **CROSS FOLDINGS**  
34M can have the cross folding options. Simply add the 2P/4P backend paper folder.
- **FOLD TYPES**  
Over 10 popular fold types available.
- **PAPER FEEDING**  
Technically speaking, when feeding is good, then the folder runs perfectly.

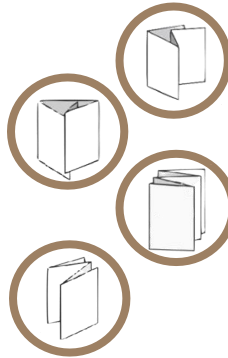

### Technical Parameters

Model	SF-34M
Folding speed	7000 sheets/h
Paper size	B6-A3
Paper weight	50-200 g/m <sup>2</sup>
Hopper capacity	500 sheets, 64 g/m <sup>2</sup>
Power supply	220V, 50Hz/ 110V, 60Hz
Size	W 1240* D 550* H 464 mm
Weight	48kg



SF-34M

# SF-5070/9012

## Flatbed Cutting Plotter



Flatbed cutting plotter

### Product Introduction

The Sunfung flatbed cutting plotter represents the latest in advanced flatbed technology. Designed with an eye for precision and accuracy, it allows clean and accurate cuts in a wide array of materials. While designed primarily as very fast cutter for projects such a box prototyping, custom packaging etc., the repeatability of precisely following the same line multiple times allows the flatbed cutting plotter to punch well above its weight class when dealing with tough substrates.

Perforation cut, Kiss cut, Die cut, Creasing – everything you need to create production quality products. Included Tools are Cutter Blade / Pen / Creasing/Etching tool. Dual head operation allows wide choice of options.

The advanced CCD camera allows the flatbed to read registration marks as small as 5mm, even on hard to read colored, transparent, glossy or reflective materials. Reading 4 registration marks can happen as fast as 4 seconds, which means production times are maximized. The user interface has been designed to be intuitive and allow first time users to easily operate the flatbed. All common and needed functions can be executed in a few easy to follow touches. The large and bright screen guarantees that cutter status is easily visible at a glance.

### Main Feature


- High-resolution camera for accurate detection of registration marks on both colored and transparent materials
- Variable material available like high reflective material, transparent materials, PVC, magnet material, etc
- SignMaster software support Ai 8.0, PDF, all bitmap file format
- Perforation cut, Kiss cut, Die-cut, Creasing
- 50-2000g adjustable downforce
- Windows OS compatibility
- Make packaging boxes, tags, hobbies & crafts, labels, etc
- 2 years warranty



SF-5070



SF-9012



# SF-5070/9012

## Flatbed Cutting Plotter

### Technical Parameters

Model	SF-5070	SF-9012
Holding method	Vacuum suction	Vacuum suction
Max cutting surface(mm)	700x500	1200x900
Cut function	Die-cut/Crease/kiss-cut/Perforation	Die-cut/Crease/kiss-cut/Perforation
Maximum cutting thickness	600 gf	600 gf
Max cutting speed(mm/s)	1200	1200
Operation	5.1-inch LCD Touch Screen	5.1-inch LCD Touch Screen
File format	Ai8.0, PDF, all bitmap	Ai8.0, PDF, all bitmap
Mechanical resolution(mm)	0.01	0.01
Repetition accuracy(mm)	+/- 0.05	+/- 0.05
Disposition	High precision servo system,CCD positioning scanning cutting	High precision servo system,CCD positioning scanning cutting
Interfaces	U-disk, USB2.0,WIFI	U-disk, USB2.0,WIFI
Software	CDR,AI plug-in mode	CDR,AI plug-in mode
Min mark edge(mm)	8	8
Gross weight(Kg)	150	180
Package dimensions(mm)	120×100X55CM(machine) 44X39X48CM (vacuum pump)	160×45X55CM(machine) 44X39X48CM (vacuum pump)
Power supply	AC100-240V / 50Hz - 60Hz, 100W/780W(air pump)	AC100-240V / 50Hz - 60Hz, 100W/780W(air pump)
Environment	5°C - 35°C , up to 70% humidity	5°C - 35°C , up to 70% humidity

### Application

#### PACKAGING



#### TAGS



#### HOBBIES/CRAFTS



#### LABELS



# EU SHOWROOM



EU showroom  
Video



+



+



EU SHOWROOM in  
Greece



# TRADE SHOW

**PRINTING UNITED EXPO**

Printing united 2024  
in USA, September  
2024

ExpoPrint Latin America 2026  
in Brazil, March 2026

EXPOPRINT  
LATIN AMERICA



Drupa 2028  
in Germany, May  
2028




**CHINA  
PRINT 2025**

China Print 2025 in Beijing,  
May 2025



All in Print 2026 in  
Shanghai,  
Oct 2026





**Sunfung Technology Corporation Ltd**

**Leading Print Finishing Equipments Supplier**

Tel: 0086-57185175095

Add: No 259 Wensan Road, Xihu District, Hangzhou, China

Email: [info@sunfung-tech.com](mailto:info@sunfung-tech.com)

Website: <https://sunfung-tech.com>



SF Introduction  
Video