

HIGH SPEED PERFECT BINDER

SF-600 P FLAGSHIP VERSION

Fully automated HD perfect binder
3X4 operation modes, easy operator set-up


Digital display. Square Angle cover station, high quality books
High speed frequency conversion control the fastest is 7 s /book



CONFIGURATION AND PARAMETER

Main Feature

- 1.7 inches industrial intelligent touch screen: sensor, motor automatic detection function, easy to operate prompt, fault judgment
- 2.The overall machine adopts the integrated frame structure: the parts have higher running precision and stronger long-term stability
- 3.475mm All -aluminum clamping splint:the car adopts bidirectional double screw eight guide rail synchronous clamping structure, no deformation, no distortion when clamping
- 4.24 teeth sun cutter and small milling cutter: high-power milling motor, milling spine clear,uniform slotting,ensuring glue space,and firmer glue binding.
- 5.one-piecegluetank:Slotted glue, side glue and bottom glue, three kinds of glueisperfectly Integrated, suitable glue binding for copper paper
- 6.Brand-new design of clamping platform : Full-scale tooth synchronization clamping structure, never stuck when clamping, more durability
- 7.The car running structure: Adopt linear guide rail + aluminum bracket guide rail to reduce the noise of car movement. Long-term operation does not beat and more stable.

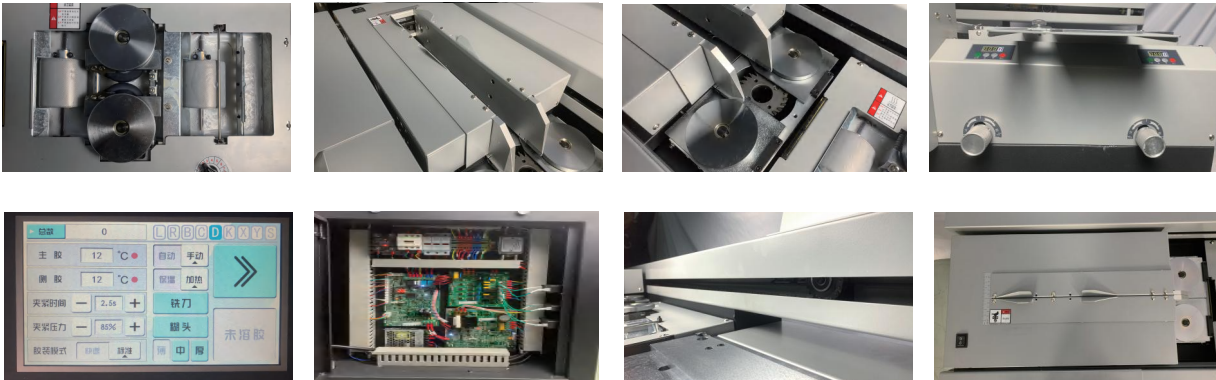

Technical Parameters

Model	SF-600P Flagship
MAX Binding Size	420mm
MAX Binding Thickness	60mm
Glue Melt Time	Abuout 45 minutes
Binding Speed	420books/hour
Hour Milling Cutter	24teeth sun cutter + double small milling cutter
Glue Roller	Independent side glue + spine glue
Auto Side Glue	Yes
Vacuum Structure	Wind wheel
Binding Method	Manual & automatic
Display	7 inch touch screen
Book Spine Angle Adjustment	Classic knob
Milling Folding	Two-fold
Power	220V/2100W
Machine Size	1580x640x1050mm
Machine weight	280KG/330KG